
stone specification Mt White - Pink

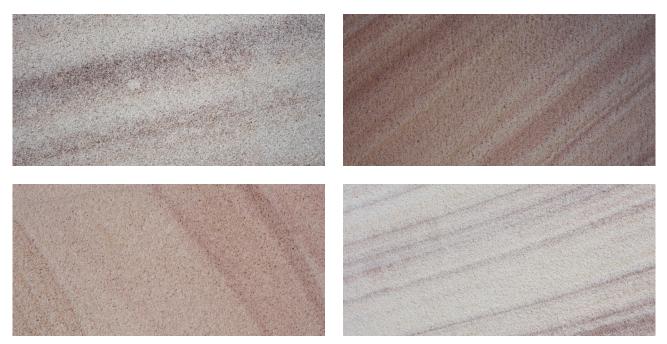

HOW TO SPECIFY

GENERAL:	Sandstone shall be Mount White - Pink Range Sandstone by Gosford Quarries	
STONE TYPE:	Mount White Sandstone	
COLOUR:	Pink	
STONE FINISH:	Diamond sawn, Gang sawn, Honed, Rockfaced, Sparrow pecked & Custom	
SIZES:	As specified by architect	
FIXING:	Adhesive Material to be compatible to substrate medium. Stone cladding above 2.3 metres in height to be mechanically fixed.	
	Refer to ASAA Natural Stone Design manual for more information.	
SEALING:	Sealer to be specified by designer or installer	

TYPICAL TECHNICAL SPECIFICATION

BULK DENSITY (ASTM C97-83):	2.25 tonnes/m³
ABSORPTION BY WEIGHT (ASTM C97-83):	4.4 %
MODULUS OF RUPTURE:	7.5 MPa Dry, 2.5 MPa Wet
COMPRESSIVE STRENGTH (ASTM CI70-87):	50 MPa Dry, 22 MPa Wet





TERREY HILLS SHOWROOM

301 Mona Vale Road Terrey Hills NSW 2084 P 02 8585 8282

SOMERSBY SHOWROOM

70 Quarry Rd Somersby NSW 2250 P 02 4340 3000 *Sandstone is a natural product and therefore subject to variation in colour, tone, shade and texture.

CLAYTON SOUTH SHOWROOM

9 Prestige Drive Clayton South VIC 3169 P 03 9558 2283

BEAUDESERT SHOWROOM

1812 Beaudesert Boonah Rd, Allenview QLD 4285 P 07 5541 0143





