


STONE SPECIFICATION

Piles Creek - Cream

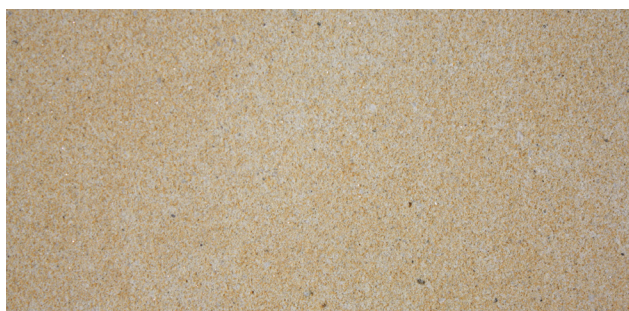

HOW TO SPECIFY

| | |
|---------------|--|
| GENERAL: | Sandstone shall be Piles Creek - Cream Sandstone by Gosford Quarries |
| STONE TYPE: | Piles Creek - Cream Sandstone |
| COLOUR: | Straw - buff oxidizing sandstone of generally uniform texture and appearance. |
| STONE FINISH: | Diamond sawn, Gang sawn, Honed, Rockfaced, Sparrow pecked & Custom |
| SIZES: | As specified by architect |
| FIXING: | Adhesive Material to be compatible to substrate medium. Stone cladding above 2.3 metres in height to be mechanically fixed. Refer to ASAA Natural Stone Design manual for more information. |
| SEALING: | Sealer to be specified by designer or installer |

TYPICAL TECHNICAL SPECIFICATION

| | |
|--------------------------------------|----------------------------|
| BULK DENSITY (ASTM C97-83): | 2.25 tonnes/m ³ |
| ABSORPTION BY WEIGHT (ASTM C97-83): | 4.2 % |
| MODULUS OF RUPTURE: | 8.0 MPa Dry, 3.5 MPa Wet |
| COMPRESSIVE STRENGTH (ASTM C170-87): | 55 MPa Dry, 35 MPa Wet |



**GOSFORD
QUARRIES
SANDSTONE**

*Sandstone is a natural product and therefore subject to variation in colour, tone, shade and texture.

TERREY HILLS SHOWROOM

301 Mona Vale Road
Terrey Hills NSW 2084
P 02 8585 8282

SOMERSBY SHOWROOM

70 Quarry Rd
Somersby NSW 2250
P 02 4340 3000

CLAYTON SOUTH SHOWROOM

9 Prestige Drive
Clayton South VIC 3169
P 03 9558 2283

BEAUDESERT SHOWROOM

1812 Beaudesert Boonah Rd,
Allenvue QLD 4285
P 07 5541 0143



facebook.com/SandstoneAustralia/



www.gosfordquarries.com.au



instagram.com/gosfordquarries/