
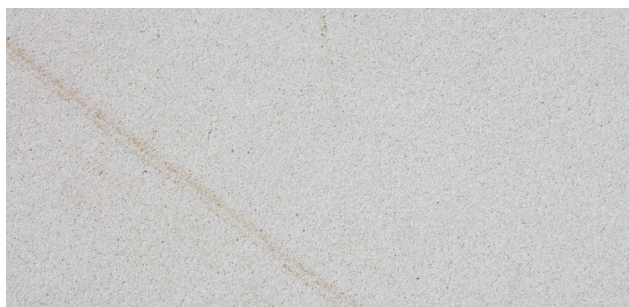
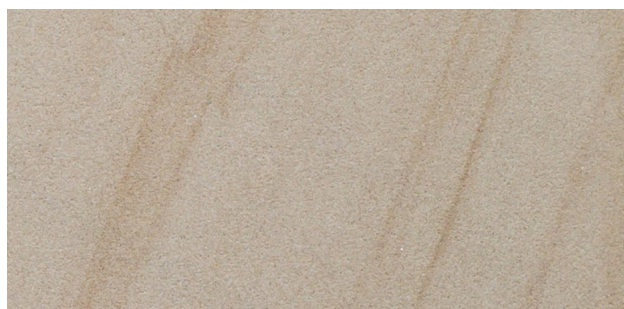


## STONE SPECIFICATION

# Mt White - White

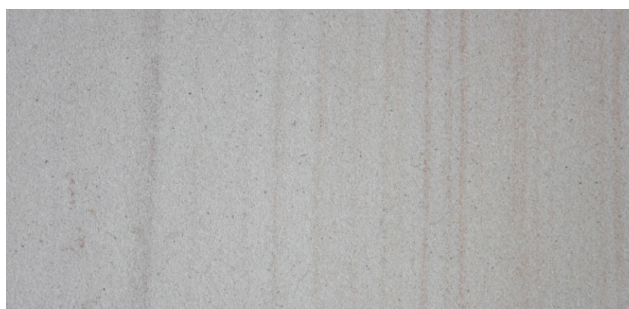

## HOW TO SPECIFY

GENERAL:	Sandstone shall be Mount White - White Range Sandstone by Gosford Quarries
STONE TYPE:	Mount White Sandstone
COLOUR:	White
STONE FINISH:	Diamond sawn, Gang sawn, Honed, Rockfaced, Sparrow pecked & Custom
SIZES:	As specified by architect
FIXING:	Adhesive Material to be compatible to substrate medium. Stone cladding above 2.3 metres in height to be mechanically fixed. Refer to ASAA Natural Stone Design manual for more information.
SEALING:	Sealer to be specified by designer or installer

## TYPICAL TECHNICAL SPECIFICATION

BULK DENSITY (ASTM C97-83):	2.25 tonnes/m <sup>3</sup>
ABSORPTION BY WEIGHT (ASTM C97-83):	4.4%
MODULUS OF RUPTURE:	7.5 MPa Dry, 2.4 MPa Wet
COMPRESSIVE STRENGTH (ASTM C170-87):	50 MPa Dry, 22 MPa Wet



**GOSFORD  
QUARRIES  
SANDSTONE**

\*Sandstone is a natural product and therefore subject to variation in colour, tone, shade and texture.

### TERREY HILLS SHOWROOM

301 Mona Vale Road  
Terrey Hills NSW 2084  
P 02 8585 8282

### SOMERSBY SHOWROOM

70 Quarry Rd  
Somersby NSW 2250  
P 02 4340 3000

### CLAYTON SOUTH SHOWROOM

9 Prestige Drive  
Clayton South VIC 3169  
P 03 9558 2283

### BEAUDESERT SHOWROOM

1812 Beaudesert Boonah Rd,  
Allenvue QLD 4285  
P 07 5541 0143



[facebook.com/SandstoneAustralia/](https://facebook.com/SandstoneAustralia/)



[www.gosfordquarries.com.au](http://www.gosfordquarries.com.au)



[instagram.com/gosfordquarries/](https://instagram.com/gosfordquarries/)